

GRAVIS
Sonus faber

Strength and Design at the highest level.





GRAVIS VI
Sonus faber



GRAVIS V
Sonus faber



DATA SHEET

SYSTEM

Closed box loading, two-driver, active subwoofer

SPEAKERS

2 x 320mm (12") double coil 4+4ohm, very long throw, sandwich honeycomb cone, wide rubber surround woofer

POWER AMPLIFICATION

High performance, class AB amplifier 1.800 W

FREQUENCY RESPONSE

18 Hz (@ - 6dB, acoustic Linkwitz 4th order roll-on, EQ1 setting) to Fc (user continuously adjustable)

VOLTAGE MAINS INPUT VOLTAGE

Selectable, 120Vac - 60Hz or 230 Vac - 50 Hz

FUSE

T12A H 250V (for 230 Vac - 60Hz) T6.3A H 250V (for 110 Vac - 50Hz)

CONTROLS

Direct access Master volume; App control featuring: volume, continuously adjustable crossover frequency (40 to 150Hz), filtering slope 24dB/oct; continuously adjustable signal phase; parametric EQ (4 presets available), Delay (1 to 20 ms); auto eq; auto power on/off switch

AUDIO SIGNAL INPUTS

2x Line level, left and right/LFE RCA phono plugs (unbalanced)
2x Line Level, left and right/LFE XLR plugs (balanced)
1x High level, Neutrik 4-pole Speakon®

POWER CONSUMPTION

0.5 W (Stand-by)
1800W (Peak)

DIMENSIONS (HxWxD)

616 x 448,5 x 585,5 mm including feet
24 x 17,6 x 23 in including feet

WEIGHT

52 Kg / 114,64 ib

SYSTEM

Closed box loading, single driver, active subwoofer

SPEAKERS

1 x 320mm (12") double coil 4+4ohm, very long throw, sandwich honeycomb cone, wide rubber surround

POWER AMPLIFICATION

High performance, class AB amplifier 850 W

FREQUENCY RESPONSE

20 Hz (@ - 6dB, acoustic Linkwitz 4th order roll-on, EQ1 setting) to Fc (user continuously adjustable)

VOLTAGE MAINS INPUT VOLTAGE

Selectable, 120Vac - 60Hz or 230 Vac - 50 Hz

FUSE

T12A H 250V (for 230 Vac - 50Hz) T6.3A H 250V (for 110 Vac - 60Hz)

CONTROLS

Direct access Master volume; App control featuring: volume, continuously adjustable crossover frequency (40 to 150Hz), filtering slope 24dB/oct; continuously adjustable signal phase; parametric EQ (4 presets available), Delay (1 to 20 ms); auto eq; auto power on/off switch

AUDIO SIGNAL INPUTS

2x Line level, left and right RCA phono plugs (unbalanced)
2x Line Level, left and right XLR plugs (balanced)
1x High level, Neutrik 4-pole Speakon®

POWER CONSUMPTION

0.5 W (Stand-by)
1200W (Peak)

DIMENSIONS (HxWxD)

455 x 448,5 x 448,5 mm including feet
17,9 x 17,6 x 17,6 in including feet

WEIGHT


32 Kg / 70.5479 ib

FINISHES

RED LACQUERED BLACK LINE



WENGE LACQUERED WHITE LINE

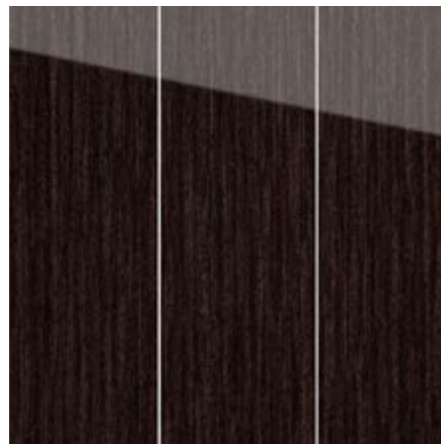

PIANO BLACK



BLACK LEATHER



BLACK LEATHER



BLACK LEATHER





GRAVIS II
Sonus faber



GRAVIS I
Sonus faber



DATA SHEET

SYSTEM

Passive radiator bass-reflex loading active subwoofer

SPEAKERS

1 x 260mm (10") very long throw, treated paper cone, wide rubber surround woofer

POWER AMPLIFICATION

High linearity Class AB
350 W rms, 700 W (peak)

FREQUENCY RESPONSE

From 25/35 Hz to Fc (user adjustable)

VOLTAGE MAINS INPUT VOLTAGE

Factory selected, 120Vac - 60Hz or 230 Vac - 50 Hz

FUSE

T6.3A (110Vac, 60Hz); T3.15A (230V, 50Hz)
Output signal short circuit;
Over-heating;
DC fault

CONTROLS

Independent Master and LFE volume controls;
Continuously adjustable Crossover frequency (30 to 120Hz), slope 24dB/oct;
Signal phase inversion switch (0/180°)
Auto switch-on/off (deselectable)

AUDIO SIGNAL INPUTS LFE

(Low Frequency Effect), single phono plug;
Line level signal, single phono plug;
High level signals, Neutrik 4-pole Speakon®

POWER CONSUMPTION

0.5 W (Stand-by)
450W (Rated power)

DIMENSIONS (HxWxD)

404 x 356 x 408 mm including feet
15,9 x 14 x 16 in including feet

WEIGHT

21,5 Kg
47,3 lb

SYSTEM

Closed box loading, down firing active subwoofer

SPEAKERS

1 x 210mm (8") very long throw, treated paper cone, wide rubber surround woofer

POWER AMPLIFICATION

High linearity Class AB
150 W rms, 250 W (peak)

FREQUENCY RESPONSE

Factory selected, 120Vac - 60Hz or 230 Vac - 50 Hz

VOLTAGE MAINS INPUT VOLTAGE

Factory selected, 120Vac - 60Hz or 230 Vac - 50 Hz

FUSE

T4.0A (110Vac, 60Hz); T2.0A (230V, 50Hz)
Output signal short circuit
Over-heating
DC fault

CONTROLS

Independent Master and LFE volume controls;
Continuously adjustable Crossover frequency (30 to 120Hz), slope 24dB/oct;
Signal phase inversion switch (0/180°)
Auto switch-on/off (deselectable)

AUDIO SIGNAL INPUTS

LFE (Low Frequency Effect), single phono plug;
Line level signal, single phono plug;
High level signals, Neutrik 4-pole Speakon®

POWER CONSUMPTION

0.5 W (Stand-by)
250W (Rated power)

DIMENSIONS (HxWxD)


334 x 286 x 316 mm including feet
13.1 x 11.2 x 12.4 in including feet

WEIGHT

14.5 Kg
32 lb

FINISHES

WHITE MATTE

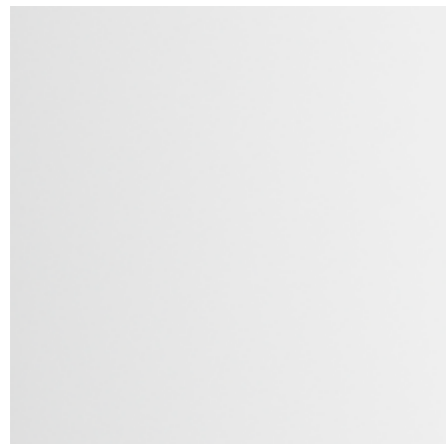

WALNUT MATTE OPEN PORE



PIANO BLACK



BLACK LEATHER



BLACK LEATHER



BLACK LEATHER

