


RAIN

OUTDOOR SPEAKERS RANGE



elipson
ARCHITECT

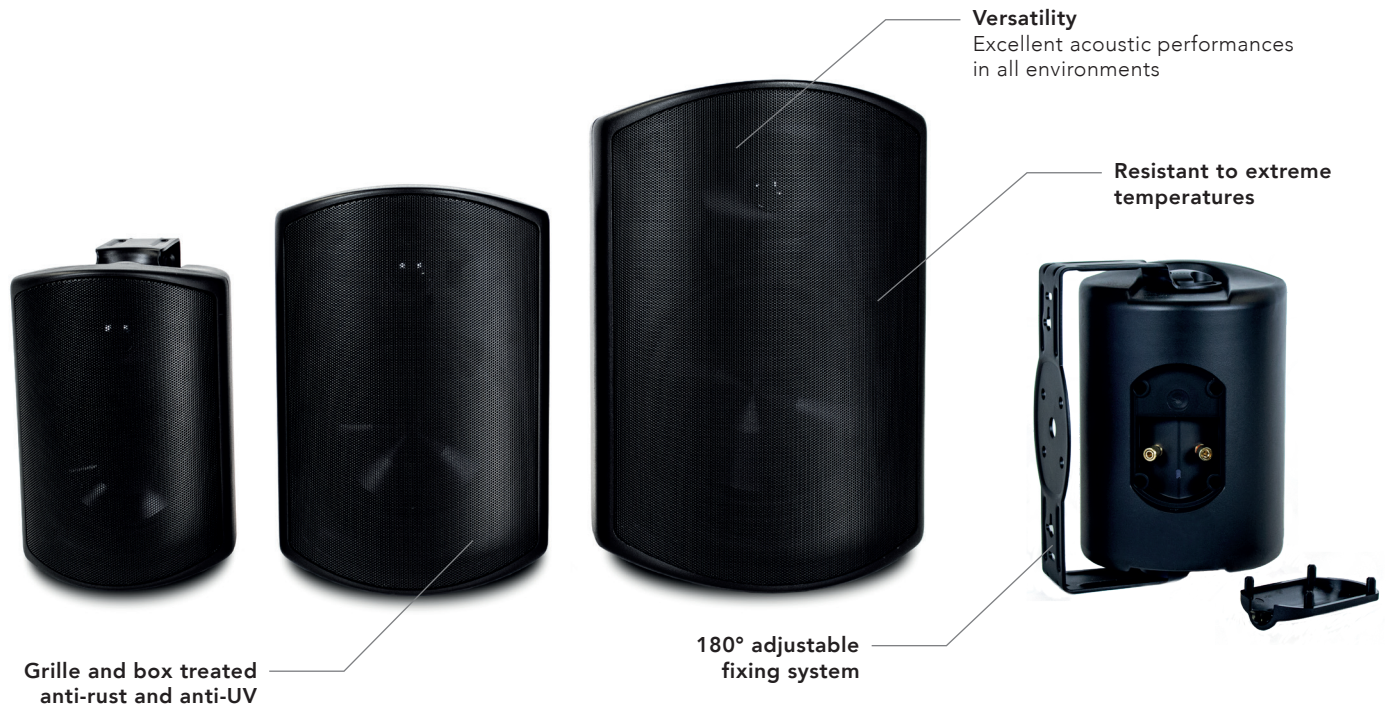

SPECIFICATIONS

RAIN 4

Type	2-way outdoor speaker
Max power	80W
Loudspeakers	Tweeter : 1" Mid-bass : 4"
Frequency response	100Hz - 20KHz
Sensitivity	87 dB/1W/1m
Impedance	8 Ohms
Crossover frequency	3250 Hz
IP code	IPX4
Min. temperature	-25°C
Max. temperature	+70°C (25% humidity)
Humidity resistance	+40°C under 95%
Treatments	Anti-rust, anti-UV
Dimensions	W154 x H230 x D145 mm

RAIN 6

Type	2-way outdoor speaker
Max power	120W
Loudspeakers	Tweeter : 1" Mid-bass : 6.5"
Frequency response	80Hz - 20KHz
Sensitivity	89 dB/1W/1m
Impedance	8 Ohms
Crossover frequency	3000 Hz
IP code	IPX4
Min. temperature	-25°C
Max. temperature	+70°C (25% humidity)
Humidity resistance	+40°C under 95%
Treatments	Anti-rust, anti-UV
Dimensions	W195 x H285 x D183 mm

RAIN 8

Type	2-way outdoor speaker
Max power	150W
Loudspeakers	Tweeter : 1" Mid-bass : 8"
Frequency response	70Hz - 20KHz
Sensitivity	90 dB/1W/1m
Impedance	8 Ohms
Crossover frequency	3200 Hz
IP code	IPX4
Min. temperature	-25°C
Max. temperature	+70°C (25% humidity)
Humidity resistance	+40°C under 95%
Treatments	Anti-rust, anti-UV
Dimensions	W244 x H355 x D230 mm

REFERENCES



● RAIN 4

EAN (unit) : NC
SKU : NC



● RAIN 6

EAN (unit) : NC
SKU : NC



● RAIN 8

EAN (unit) : NC
SKU : NC