


Sonus faber
35TH ANNIVERSARY
1983 · 2018

PRODUCTS BOOK



OCTOBER 2018

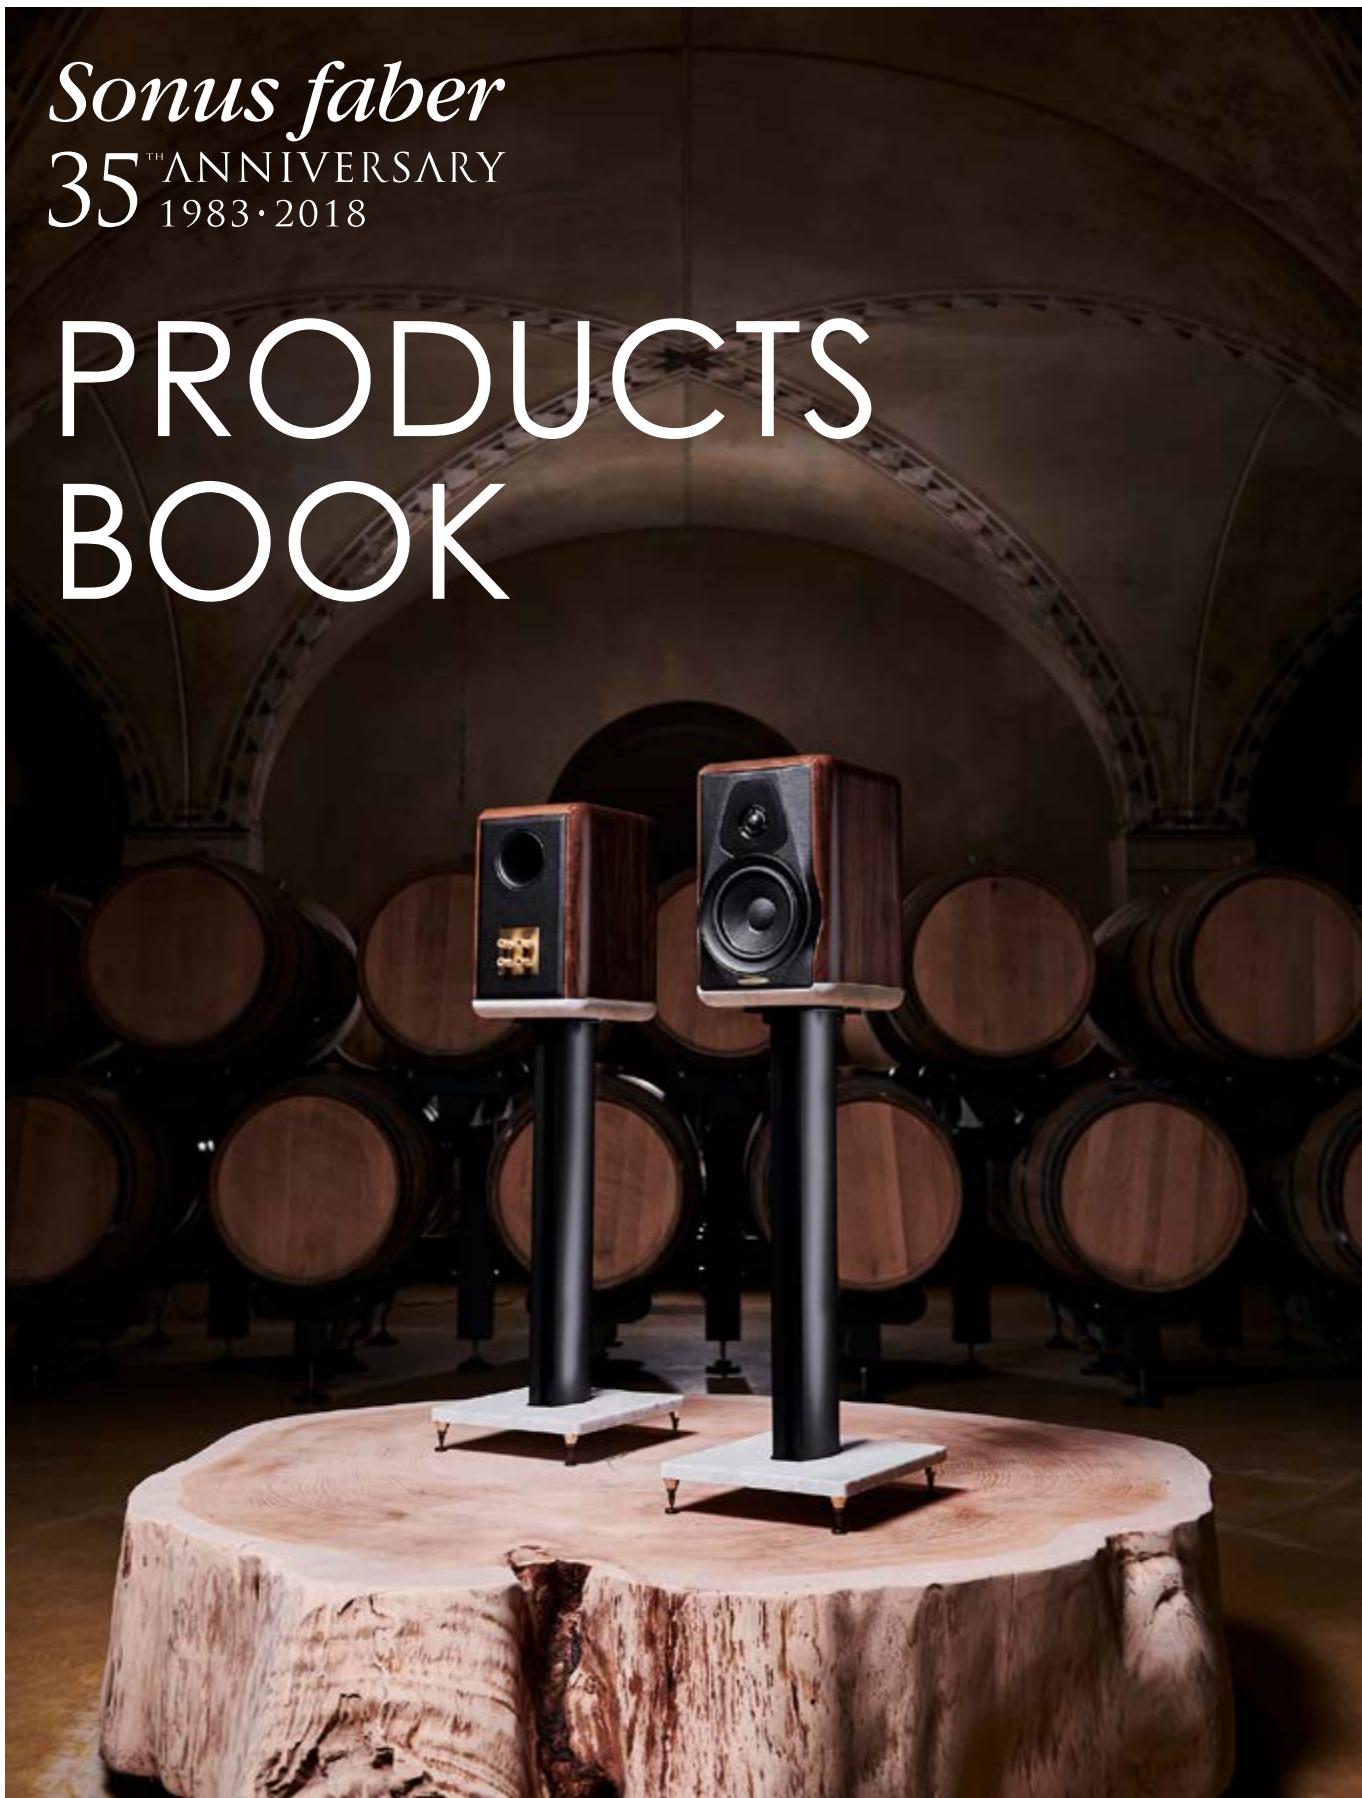

Sonus faber

TABLE OF CONTENTS


REFERENCE COLLECTION	4	
SPECIAL EDITION	30	20 HOMAGE TRADITION COLLECTION
SONETTO COLLECTION	45	34 OLYMPICA COLLECTION
GRAVIS COLLECTION	54	50 CHAMELEON COLLECTION
		60 ALL IN ONE

THE SONUS FABER SE17	4	8	AIDA MY17
LILIUM	12	16	IL CREMONESE
AMATI TRADITION	22	24	SERAFINO TRADITION
GUARNERI TRADITION	26	28	VOX TRADITION
ELECTA AMATOR III	30	36	OLYMPICA III
OLYMPICA II	38	40	OLYMPICA I
OLYMPICA CENTER	42	47	SONETTO VIII
SONETTO V	47	47	SONETTO III
SONETTO II	48	48	SONETTO I
SONETTO CENTER II	48	49	SONETTO CENTER I
SONETTO WALL	49	53	CHAMELEON T
CHAMELEON B	53	53	CHAMELEON C
GRAVIS VI	57	57	GRAVIS V
GRAVIS II	59	59	GRAVIS I
SF16	60		



The "Non Plus Ultra" of a Dream.
State-of-the-art of sound
reproduction



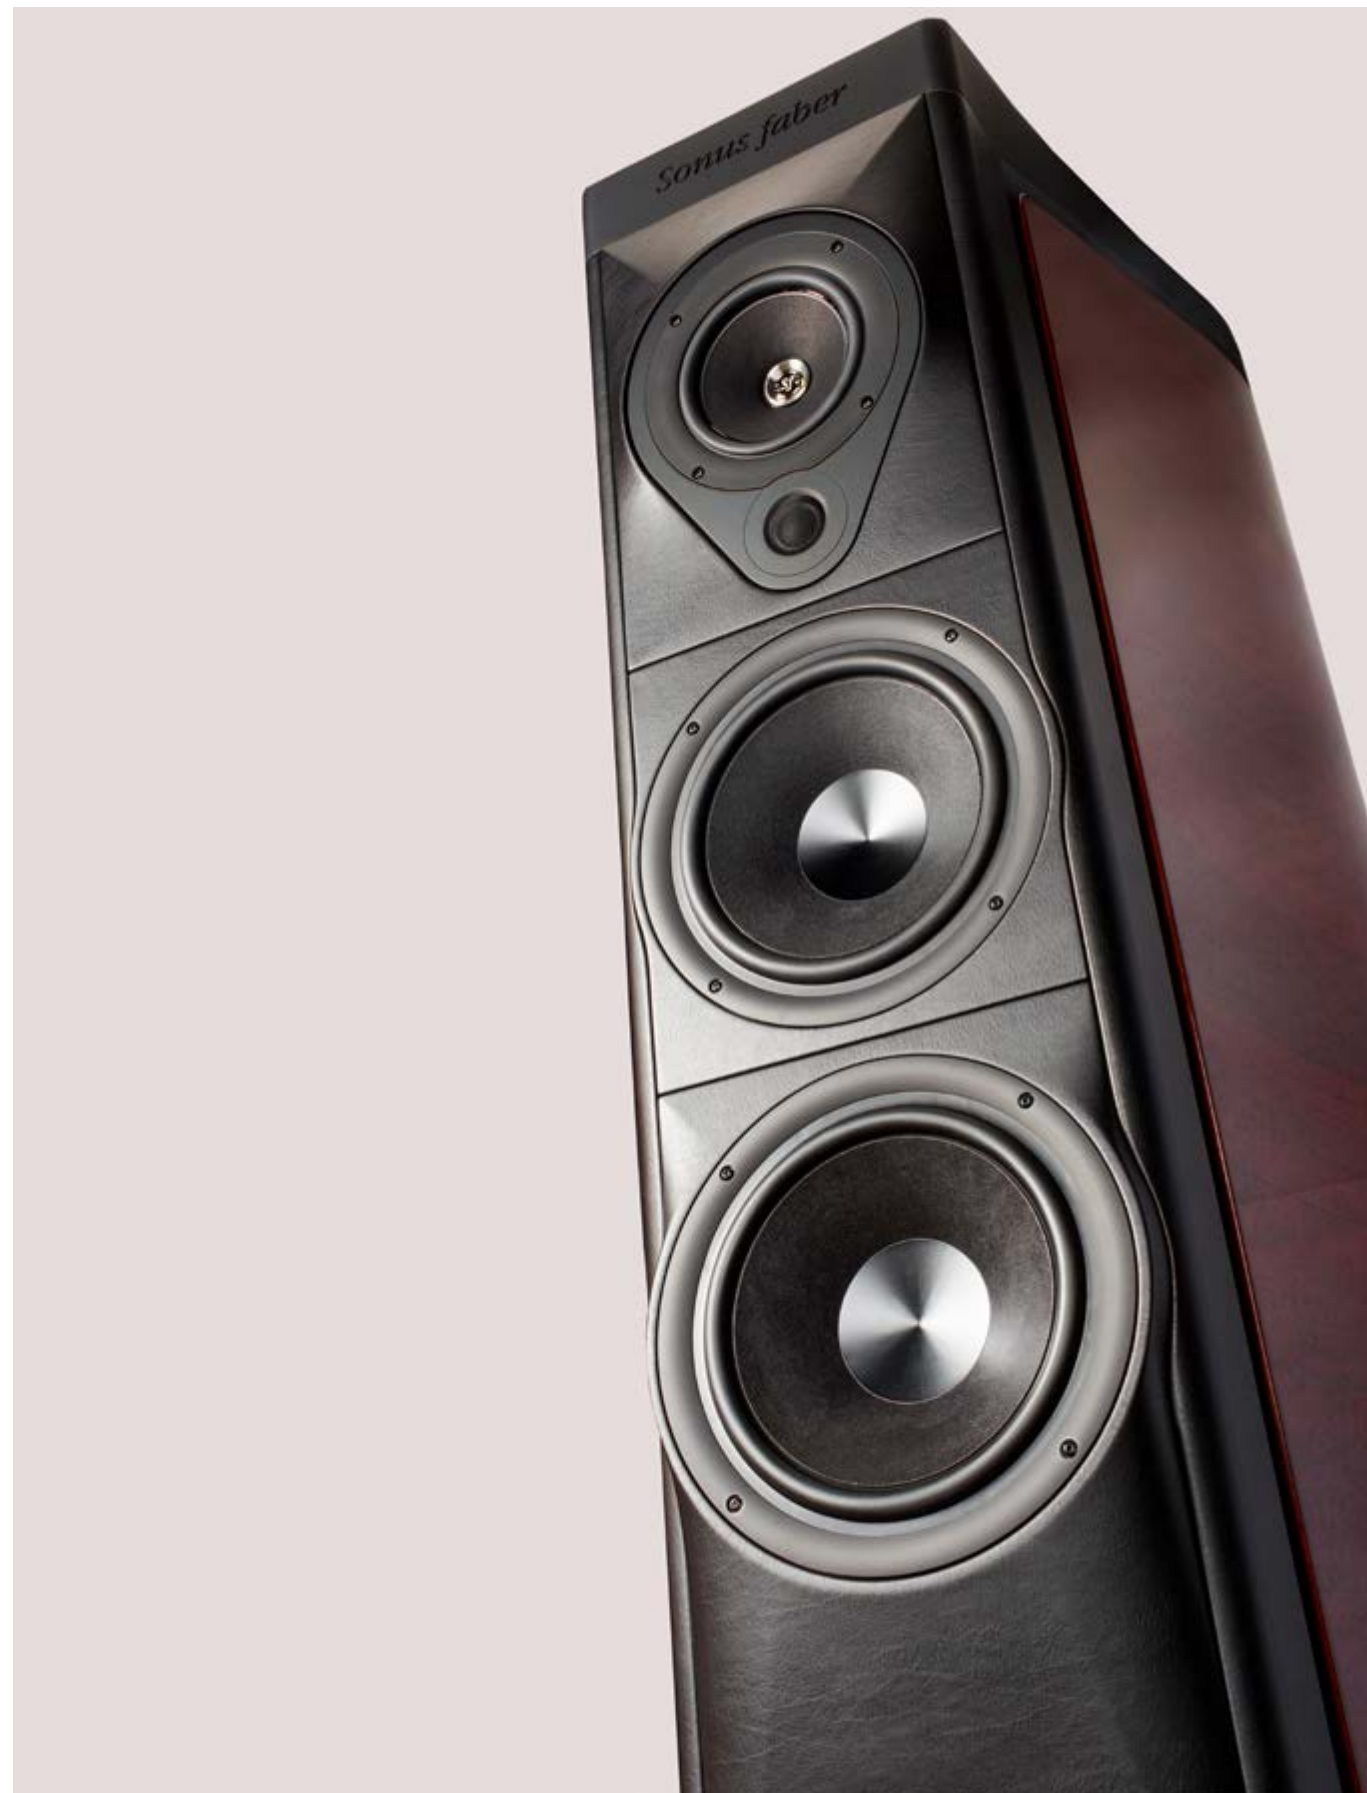

DATA SHEET

SYSTEM

3.5 way, sound field shaper variable geometry radiation, vibration cancellation optimized system, stealth reflex vented box, loudspeaker system.

LOUDSPEAKERS

Tw: Beryllium dome diaphragm, Ø 30 mm
Md: Neodymium Magnet System, Ø 180 mm
W: sandwich cone structure, high-tech syntactic foam core and two external surface skins of coated cellulose pulp, 2 x Ø 260 mm
Sw: sandwich cone structure with high-tech syntactic foam core and two external surface skins in nano carbon fiber, Ø 380 mm

SOUND FIELD SHAPER

Tw: Neodymium dome driver, Ø 29 mm
Md: paper pulp/natural fiber blend cone driver, Ø 120 mm

CROSSOVER

80Hz - 250Hz - 2500Hz

FREQUENCY RESPONSE

18Hz - 36000Hz, Stealth reflex included

SENSITIVITY

92 db spl (2.83V/1m)

NOMINAL IMPEDANCE

4 ohm

POWER HANDLING

100W - 1KW, without clipping

DIMENSIONS (HxWxD)

1750 x 750 x 785 mm
68,8 x 29,5 x 31 in

WEIGHT

307 Kg ea - net weight
676 lb ea - net weight



FINISHES

CUSTOM FINISHES AVAILABLE


RED LACQUERED BLACK LINE



BLACK LEATHER




WALNUT LACQUERED BLACK LINE

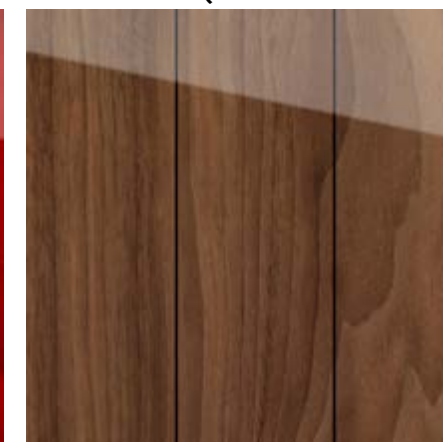

BLACK LEATHER



WENGE LACQUERED WHITE LINE

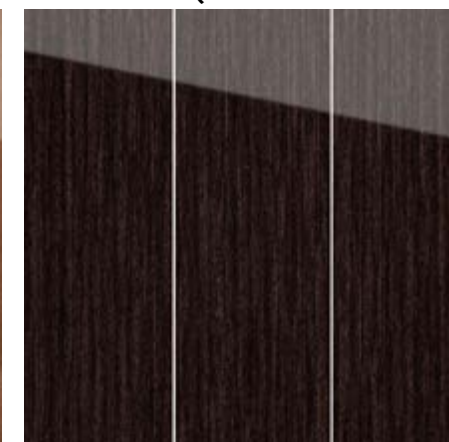

BLACK LEATHER



Sonus faber

Aida
LIMITLESS IMMERSION

A beauty that seduces with natural shapes because they stem from precise acoustic needs, not merely decoration.





DATA SHEET

SYSTEM

"3 and 2/3" way, Sound field Shaper technology, "Zero Vibration Transmission™" technology, para-aperiodic vented box "Stealth Ultraflex System™" and staggered low frequency floor standing loudspeaker system

LOUDSPEAKERS

Tw: H28 XTR-04 DAD Arrow Point, Ø 28 mm
Md: M18 XTR-04 Neodymium Magnet System, Ø 180 mm
W: 2 x W22XTR-12 Neodymium Magnet System, Ø 220 mm
Sw: SW32XTR-08 Neodymium Magnet System, Ø 320 mm

SOUND FIELD SHAPER

Tw: 29XTR2 DAD Arrow Point, Ø 29 mm
Md: 2 x M8XTR, Ø 80 mm

CROSS-OVER

55Hz - 150Hz - 200Hz - 3000Hz

FREQUENCY RESPONSE

18 Hz – 35.000 Hz,
Stealth Ultraflex™ included

SENSITIVITY

92 db SPL (2.83V/1 m)

NOMINAL IMPEDANCE

4 ohm

POWER HANDLING

100W – 1KW, without clipping

DIMENSIONS (HxWxD)

1725 x 482 x 780 mm
68 x 19 x 31 in

WEIGHT

165 Kg ea – net weight
363 lb ea – net weight




FINISHES

CUSTOM FINISHES AVAILABLE

RED LACQUERED BLACK LINE



WENGE LACQUERED WHITE LINE

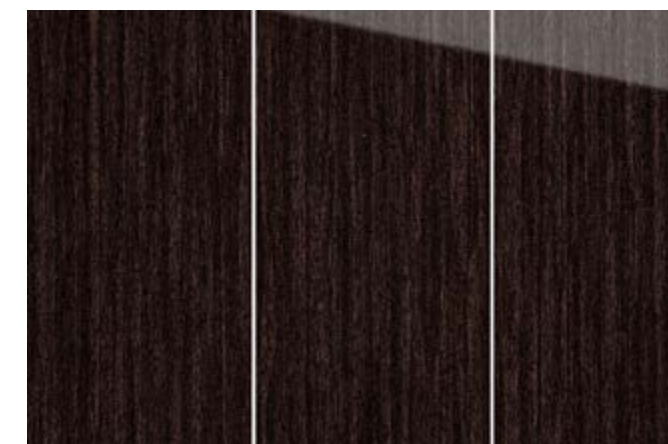

BLACK LEATHER



BLACK LEATHER



Lilium
Sonus faber

Strength and grace. Dynamics and melody.
Full and empty. Sweetness and impetuosity.
Strong contrasts, seemingly opposites,
that coexist in Music.





DATA SHEET

SYSTEM

3.5 way para-a-periodic vented box

LOUDSPEAKERS

Tw: H28 XTR-04 DAD Arrow Point, Ø 28 mm
Md: M18 XTR-04 Neodymium Magnet System, Ø 180 mm
W: 3 x W18XTR-16, Ø 180 mm
Sw: SW26 XT-08, Ø 260 mm

CROSS-OVER

55Hz - 150Hz - 200Hz - 3000Hz

FREQUENCY RESPONSE

20 Hz - 35.000 Hz, Stealth reflex included

SENSITIVITY

92 db SPL (2.83V/1 m)

NOMINAL IMPEDANCE

4 ohm

SUGGESTED AMPLIFIER

POWER OUTPUT

100 - 800 W, without clipping

LONG-TERM MAX INPUT VOLTAGE

(IEC 268-5)

30 V rms

DIMENSIONS (HxWxD)

1600 x 491 x 705 mm

63 x 19,3 x 27,7 in

WEIGHT

103 Kg ea - net weight

227 lb ea - net weight



FINISHES

CUSTOM FINISHES AVAILABLE


RED LACQUERED BLACK LINE




BLACK LEATHER



WALNUT LACQUERED BLACK LINE WENGE LACQUERED WHITE LINE

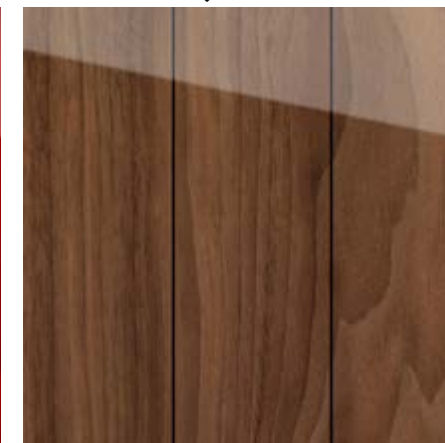

BLACK LEATHER

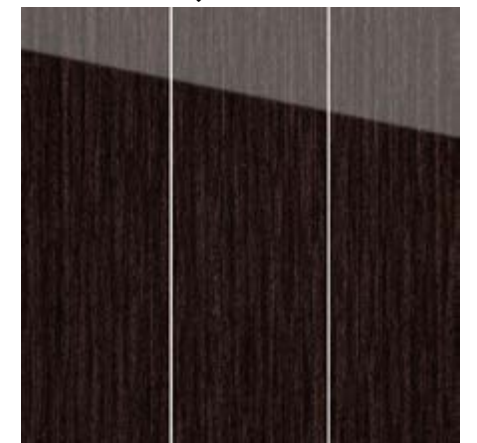

BLACK LEATHER



IL CREMONESE

Str.º Stradivari

True in the history of Italian violin making and to its own innovative spirit,
Sonus faber pays homage to the great Antonio Stradivari.
As the Stradivari's instrument, even Il Cremonese is
the result of scientific researches and deep passion.





DATA SHEET

SYSTEM

3.5 way, full para-aperiodic vented box

LOUDSPEAKERS

Tw: H28 XTR-04 DAD Arrow Point, Ø 28 mm

Md: M18 XTR-04 Neodymium Magnet System, Ø 180 mm

W: 2 x W18XTR-12, Ø 180 mm

Sw: 2 x W22XTR-16, Ø 220 mm

CROSS-OVER

80Hz - 250Hz - 2500Hz

FREQUENCY RESPONSE

35 Hz – 30.000 Hz, tuning port included

SENSITIVITY

92 db SPL (2.83V/1 m)

NOMINAL IMPEDANCE

4 ohm

SUGGESTED AMPLIFIER

POWER OUTPUT

100W – 800W, without clipping

LONG-TERM MAX INPUT VOLTAGE

(IEC 268-5)

30 V rms

DIMENSIONS (HxWxD)

1449 x 398 x 621 mm

57 x 15,6 x 24,5 in

WEIGHT

84 Kg ea – net weight

185 lb ea – net weight



FINISHES

CUSTOM FINISHES AVAILABLE


RED LACQUERED BLACK LINE




BLACK LEATHER



WALNUT LACQUERED BLACK LINE WENGE LACQUERED WHITE LINE

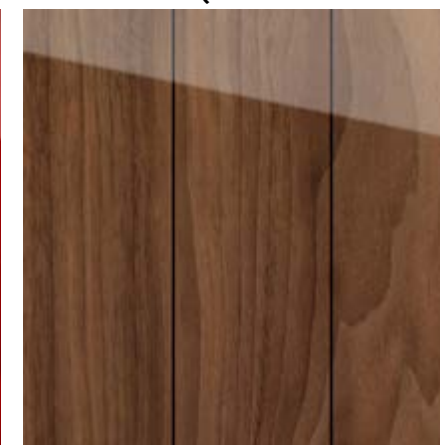

BLACK LEATHER

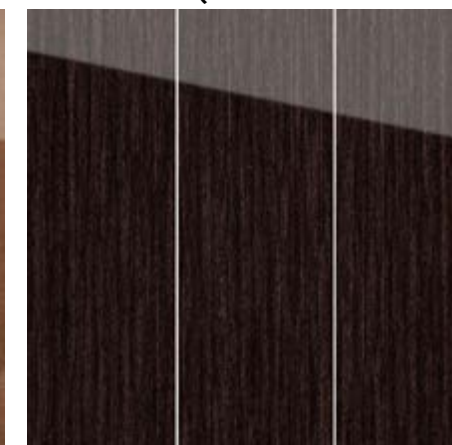

BLACK LEATHER



Sonus faber
HOMAGE
TRADITION
Luxury Everyday



AMATI TRADITION

Flagship of Homage Tradition collection,
Amati is the new reference floor standing loudspeaker in the
Sonus faber catalogue, right after Il Cremonese, Lilium and Aida,
from which inherits many technical solutions and patents.



DATA SHEET

SYSTEM

3.5 way, full para-aperiodic vented box
"Stealth Ultraflex" system and "Zero
Vibration Transmission" technology

LOUDSPEAKERS

Tw: H28 XTR-04 DAD Arrow Point, Ø 28 mm
Md: M15 XTR-04 Neodymium Magnet
System, Ø 150 mm
W: 2 x W22XTR-08, Ø 220 mm

CROSS-OVER

80Hz - 250Hz - 2.500Hz

FREQUENCY RESPONSE

28 Hz - 35.000 Hz, Stealth reflex included

SENSITIVITY

90 db SPL (2.83V/1 m)

NOMINAL IMPEDANCE

4 ohm

SUGGESTED AMPLIFIER

POWER OUTPUT

100W - 500W, without clipping

LONG-TERM MAX INPUT VOLTAGE

(IEC 268-5)

22 V rms

DIMENSIONS (HxWxD)

1176 x 411 x 512 mm

46,3 x 16,2 x 20,1 in

WEIGHT

61 Kg ea - net weight

134,5 lb ea - net weight



FINISHES

CUSTOM FINISHES AVAILABLE

RED LACQUERED BLACK LINE



WENGE LACQUERED WHITE LINE



BLACK LEATHER



BOWN LEATHER



ALUMINUM - TITANIUM FINISH



ALUMINUM - BLACK SATIN FINISH



SERAFINO TRADITION

The Homage collection has been enriched with a new element that complements the family. Serafino, a floor speaker with a huge appeal and a surprising power to be explored.



DATA SHEET

SYSTEM

3.5 way, full para-aperiodic vented box "Stealth Ultraflex" system and "Zero Vibration Transmission" technology

LOUDSPEAKERS

Tw: H28 XTR-04 DAD Arrow Point, Ø 28 mm
Md: M15 XTR-04 Neodymium Magnet System, Ø 150 mm
W: 2 x W22XTR-08, Ø 220 mm

CROSS-OVER

80Hz - 250Hz - 2.500Hz

FREQUENCY RESPONSE

28 Hz - 35.000 Hz, Stealth reflex included

SENSITIVITY

90 db SPL (2.83V/1 m)

NOMINAL IMPEDANCE

4 ohm

SUGGESTED AMPLIFIER

POWER OUTPUT
100W - 500W, without clipping

LONG-TERM MAX INPUT VOLTAGE

(IEC 268-5)
22 V rms

DIMENSIONS (HxWxD)

1176 x 411 x 512 mm
46,3 x 16,2 x 20,1 in

WEIGHT

61 Kg ea - net weight
134,5 lb ea - net weight



FINISHES

CUSTOM FINISHES AVAILABLE

RED LACQUERED BLACK LINE



WENGE LACQUERED WHITE LINE



BLACK LEATHER



BOWN LEATHER



ALUMINUM - TITANIUM FINISH



ALUMINUM - BLACK SATIN FINISH



GUARNERI TRADITION

At its fourth revamp, improved in structure and technology; Guarneri keep its role of the most iconic Sonus faber bookshelf loudspeaker, refined and powerful at the same time.



DATA SHEET

SYSTEM

2 way, full para-aperiodic vented box "Stealth Ultraflex System" and "Zero Vibration Transmission" technology

LOUDSPEAKERS

Tw: H28 XTR-04 DAD Arrow Point, Ø 28 mm
Mw: W15 XTR-04 Neodymium Magnet System, Ø 150 mm

CROSS-OVER

2.500Hz

FREQUENCY RESPONSE

40 Hz – 35.000 Hz, Stealth reflex included

SENSITIVITY

87 db SPL (2.83V/1 m)

NOMINAL IMPEDANCE

4 ohm

SUGGESTED AMPLIFIER

POWER OUTPUT

30W – 250W, without clipping

LONG-TERM MAX INPUT VOLTAGE

(IEC 268-5)

20 V rms

DIMENSIONS (HxWxD)

758 x 300 x 390 mm (dedicated stand incl.)

29,8 x 11,8 x 15,3 in (dedicated stand incl.)

WEIGHT

29 Kg ea – net weight (dedicated stand incl.)

64 lb ea – net weight (dedicated stand incl.)



FINISHES

CUSTOM FINISHES AVAILABLE

RED LACQUERED BLACK LINE



WENGE LACQUERED WHITE LINE



BLACK LEATHER



BOWN LEATHER



ALUMINUM - TITANIUM FINISH



ALUMINUM - BLACK SATIN FINISH



VOX TRADITION

A loudspeaker designated as the solution to bring to life the voice,
Vox Tradition is the loudspeaker for
a state-of-the-art home theater system.



DATA SHEET

SYSTEM

3 way, full para-aperiodic vented box
"Stealth Ultraflex System" technology

LOUDSPEAKERS

Tw: H28 XTR3-04 DAD Arrow Point, Ø 28 mm
Md: M15 XTR-08 Neodymium Magnet System, Ø 150 mm
W: 2 x W18XTR-08, Ø 180 mm

CROSS-OVER

250 Hz - 2500Hz

FREQUENCY RESPONSE

40 Hz – 35.000 Hz, Stealth reflex included

SENSITIVITY

89 db SPL (2.83V/1 m)

NOMINAL IMPEDANCE

4 ohm

SUGGESTED AMPLIFIER

POWER OUTPUT

50W – 350W, without clipping

LONG-TERM MAX INPUT VOLTAGE

(IEC 268-5)
20 V rms

DIMENSIONS (HxWxD)

315 x 836 x 385 mm
12,4 x 32,9 x15 in

WEIGHT

35 Kg – net weight
77 lb – net weight



FINISHES

CUSTOM FINISHES AVAILABLE

RED LACQUERED BLACK LINE



WENGE LACQUERED WHITE LINE



BLACK LEATHER



BOWN LEATHER



ALUMINUM - TITANIUM FINISH



ALUMINUM - BLACK SATIN FINISH



Sonus faber

ELECTA AMATOR
III

Legacy refined

Tradition, Expertise, Evolution.
The fil rouge that lead us so far.
The taste for Beauty.
What pushed us beyond.



Sonus faber

ELECTA AMATOR
III

Legacy refined



DATA SHEET

SYSTEM

2-way bookshelf/standmount vented
loudspeaker system

LOUDSPEAKERS

Tw: H28 XTR-04 DAD™, Ø 28 mm
Mw: MW18XTR-04, Ø 180 mm

CROSS-OVER

2500Hz

FREQUENCY RESPONSE

40 Hz – 35.000 Hz

SENSITIVITY

88 dB SPL (2,83V/1 m)
NOMINAL IMPEDANCE
4 ohm

POWER SUGGESTED

AMPLIFIER POWER OUTPUT
35W - 200W, without clipping

LONG-TERM MAX INPUT VOLTAGE

(IEC 268-5)
20 V rms

**SPEAKER DIMENSIONS (HxWxD)
& WEIGHT**

375 x 235 x 360 mm
148 x 93 x 142 in
14,6 Kg ea – net weight
32,2 lb ea – net weight


**STAND DIMENSIONS (HxWxD)
& WEIGHT**

720 x 300 x 350 mm
284 x 118 x 138 in
9,5 Kg ea – net weight
21 lb ea – net weight



FINISHES

WALNUT MATTE CLOSED PORE

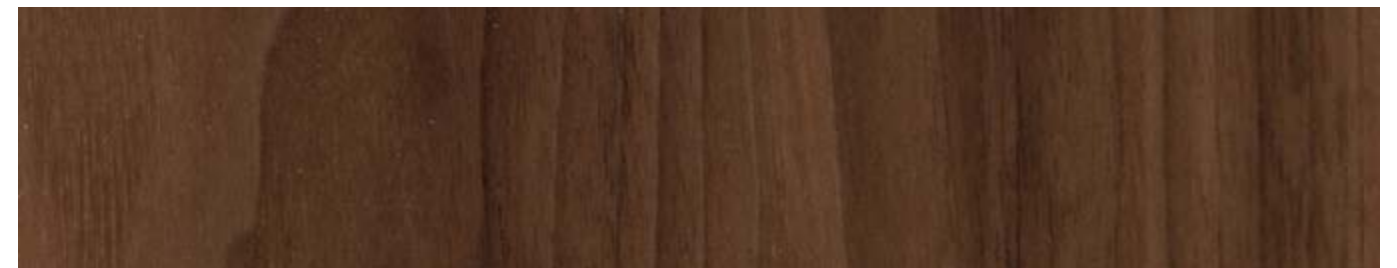

BLACK LEATHER



CARRARA MARBLE



BRASS



Sonus faber
OLYMPICA
a new **classic** emotion

A timeless new feeling.
The right balance between power and elegance



Sonus faber
OLYMPICA
III

The maximum tribute to our territory and its invaluable artistic heritage.



DATA SHEET

SYSTEM

3 way floorstanding, paralaminar stealth flow vented loudspeaker

LOUDSPEAKERS

Tw: 29XTR2 DAD Arrow Point, Ø 29 mm
Md: M15XTR, Ø 150 mm
W: 2 x W18XTR, Ø 180 mm

CROSS-OVER

250Hz - 2.500Hz

FREQUENCY RESPONSE

35 Hz - 30.000 Hz, tuning port included

SENSITIVITY

90 dB SPL (2.83 V/1m)

NOMINAL IMPEDANCE

4 ohm

POWER SUGGESTED

AMPLIFIER POWER OUTPUT
50W - 300W, without clipping

LONG-TERM MAX INPUT VOLTAGE

(IEC 268-5)
22 V rms

DIMENSIONS (HxWxD)

1114 x 403 x 508 mm
43.8 x 15.8 x 20 in

WEIGHT

36 Kg ea - net weight
79,3 lb ea - net weight



FINISHES

EXTRA CUSTOM FINISHES POSSIBILITY

WALNUT MATTE WHITE LINE



BLACK LEATHER



WENGE MATTE WHITE LINE



BLACK LEATHER



Sonus faber
OLYMPICA
II

A refined and complete floor standing speaker system
that encases tradition and innovation.



DATA SHEET

SYSTEM

3 way floorstanding, paralaminar stealth flow vented loudspeaker

LOUDSPEAKERS

Tw: 29XTR2 DAD Arrow Point, Ø 29 mm
Md: M15XTR, Ø 150 mm
W: W18XTR, Ø 180 mm

CROSS-OVER

250Hz - 2.500Hz

FREQUENCY RESPONSE

40 Hz - 30.000 Hz, tuning port included

SENSITIVITY

88 dB SPL (2.83 V/1m)

NOMINAL IMPEDANCE

4 ohm

SUGGESTED AMPLIFIER

POWER OUTPUT

50W - 250W, without clipping

LONG-TERM MAX INPUT VOLTAGE

(IEC 268-5)
22 V rms

DIMENSIONS (HxWxD)

1055 x 370 x 472 mm
41,5 x 14,5 x 18,5 in

WEIGHT

31 Kg ea - net weight
68,3 lb ea - net weight



FINISHES

EXTRA CUSTOM FINISHES POSSIBILITY

WALNUT MATTE WHITE LINE



BLACK LEATHER



WENGE MATTE WHITE LINE



BLACK LEATHER



Sonus faber
OLYMPICA
I

The experience coming from the iconic Minima and Electa merges with the Italian violin making tradition of the first Guarneri and gives life to a new harmonic shape.



DATA SHEET

SYSTEM

2 way standmount, paralaminar stealth flow vented loudspeaker

LOUDSPEAKERS

Tw: 29XTR2 DAD Arrow Point Neodymium motor system, Ø 29 mm
Md: MW15XTR, Ø 150 mm

CROSS-OVER

2.500Hz

FREQUENCY RESPONSE

50 Hz – 30.000 Hz, tuning port included

SENSITIVITY

87 dB SPL (2.83 V/1m)

NOMINAL IMPEDANCE

4 ohm

SUGGESTED AMPLIFIER

POWER OUTPUT

40W – 150W, without clipping

LONG-TERM MAX INPUT VOLTAGE

(IEC 268-5)
20 V rms

DIMENSIONS (HxWxD)

354 x 222 x 368 mm
14 x 8,7 x 14,5 in
714 x 287 x 376 mm (optional dedicated stand)
28,1 x 11,3 x 14,8 in (optional dedicated stand)

WEIGHT

9,5 Kg ea – net weight
20 lb ea – net weight
17 Kg ea - dedicated stand incl. (optional)
37,4 lb ea - dedicated stand incl. (optional)



FINISHES

EXTRA CUSTOM FINISHES POSSIBILITY

WALNUT MATTE WHITE LINE



WENGE MATTE WHITE LINE



BLACK LEATHER



BLACK LEATHER



Sonus faber
OLYMPICA
CENTER

The natural completion of an high end system, where high level of accuracy elegance and performance work together to reach a wonderful sound and design.



DATA SHEET

SYSTEM

3 way floorstanding, paralaminar "stealth ultraflex" vented loudspeaker

LOUDSPEAKERS

Tw: 29XTR2 DAD Arrow Point, Ø 29 mm
Mr: M8XTR, Ø 80 mm
W: W15XTR, Ø 150 mm

CROSS-OVER

250Hz - 2.500Hz

FREQUENCY RESPONSE

50 Hz - 30.000 Hz, tuning port included

SENSITIVITY

88 dB SPL (2.83 V/1m)

NOMINAL IMPEDANCE

4 ohm

SUGGESTED AMPLIFIER

POWER OUTPUT

50W - 300W, without clipping

LONG-TERM MAX INPUT VOLTAGE

(IEC 268-5)
22 V rms

DIMENSIONS (HxWxD)

230 x 649 x 353 mm
9 x 25,5 x 13,8 in
443 x 438 x 310 mm (optional dedicated stand)
17,5 x 17,2 x 12,2 in (optional dedicated stand)

WEIGHT

10 kg ea - net weight
22 lb ea - net weight
17 Kg ea - dedicated stand incl. (optional)
37,4 lb ea - dedicated stand incl. (optional)



FINISHES

EXTRA CUSTOM FINISHES POSSIBILITY

WALNUT MATTE WHITE LINE



WENGE MATTE WHITE LINE



BLACK LEATHER



BLACK LEATHER



Sonus faber

SONETTO

Italian Poetry

The Music, the unique character





Sonus faber
**SONETTO
VIII**



Sonus faber
**SONETTO
V**



Sonus faber
**SONETTO
III**



DATA SHEET

SYSTEM
3-way floorstanding loudspeaker system.
Vented box design.

LOUDSPEAKERS
Tw: High Definition DAD™ driver. DKM dome diaphragm, Ø 29mm
Md: Custom diaphragm made with cellulose pulp and other natural fibers, Ø 150mm
W: Ultra-free compression basket, aluminum cone for maximum speed. Ø 3x180mm cone drivers.

CROSS-OVER
270Hz - 3.000Hz

FREQUENCY RESPONSE
36 Hz - 25.000 Hz

SENSITIVITY
90 dB SPL (2.83 V/1m)

NOMINAL IMPEDANCE
4 ohm

**SUGGESTED AMPLIFIER
POWER OUTPUT**
50W - 300W, without clipping

**LONG-TERM MAX INPUT VOLTAGE
(IEC 268-5)**
22 V rms

DIMENSIONS (HxWxD)
1188 x 283 x 427 mm
47 x 11 x 17 in

WEIGHT
26,3 Kg ea - net weight
57,9 lb ea - net weight

SYSTEM
3-way floorstanding loudspeaker system.
Vented box design.

LOUDSPEAKERS
Tw: High Definition DAD™ driver. DKM dome diaphragm, Ø 29mm
Md: Custom diaphragm made with cellulose pulp and other natural fibers, Ø 150mm
W: Ultra-free compression basket, aluminum cone for maximum speed. Ø 2x180mm cone drivers.

CROSS-OVER
235Hz - 3.000Hz

FREQUENCY RESPONSE
38 Hz - 25.000 Hz

SENSITIVITY
90 dB SPL (2.83 V/1m)

NOMINAL IMPEDANCE
4 ohm

**SUGGESTED AMPLIFIER
POWER OUTPUT**
50W - 300W, without clipping

**LONG-TERM MAX INPUT VOLTAGE
(IEC 268-5)**
22 V rms

DIMENSIONS (HxWxD)
1072 x 258 x 409 mm
42 x 10 x 16 in

WEIGHT
22,6 Kg ea - net weight
49,8 lb ea - net weight

SYSTEM
3-way floorstanding loudspeaker system.
Vented box design.

LOUDSPEAKERS
Tw: High Definition DAD™ driver. DKM dome diaphragm, Ø 29mm
Md: Custom diaphragm made with cellulose pulp and other natural fibers, Ø 150mm
W: Ultra-free compression basket, aluminum cone for maximum speed. Ø 2x150mm cone drivers.

CROSS-OVER
220Hz - 3.250Hz

FREQUENCY RESPONSE
42 Hz - 25.000 Hz

SENSITIVITY
89 dB SPL (2.83 V/1m)

NOMINAL IMPEDANCE
4 ohm

**SUGGESTED AMPLIFIER
POWER OUTPUT**
50W - 250W, without clipping


**LONG-TERM MAX INPUT VOLTAGE
(IEC 268-5)**
22 V rms

DIMENSIONS (HxWxD)
1018 x 219 x 305 mm
40 x 9 x 12 in

WEIGHT
16 Kg ea - net weight
35,2 lb ea - net weight

FINISHES

WHITE MATTE

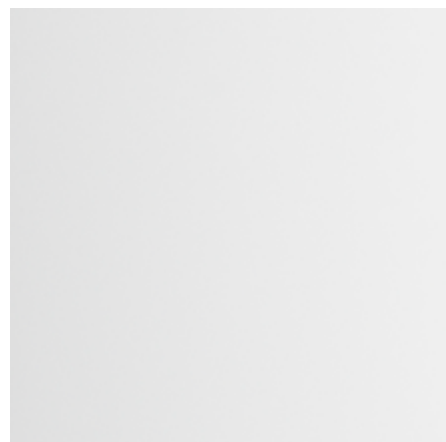

WALNUT MATTE OPEN PORE



PIANO BLACK



BLACK LEATHER



BLACK LEATHER



BLACK LEATHER



Sonus faber
SONETTO
II



Sonus faber
SONETTO
I



Sonus faber
SONETTO
CENTER II



Sonus faber
SONETTO
CENTER I



Sonus faber
SONETTO
WALL



DATA SHEET

SYSTEM

2-way shelf loudspeaker system. Vented box design.

LOUDSPEAKERS

Tw: High Definition DAD™ driver. DKM dome diaphragm, Ø 29mm
Mw: Custom diaphragm made with cellulose pulp and other natural fibers, Ø 165mm

CROSS-OVER

2650Hz

FREQUENCY RESPONSE

42 Hz – 25.000 Hz

SENSITIVITY

87 dB SPL (2.83 V/1m)

NOMINAL IMPEDANCE

4 ohm

SUGGESTED AMPLIFIER

POWER OUTPUT
40W – 200W, without clipping

LONG-TERM MAX INPUT VOLTAGE

(IEC 268-5)
20 V rms

DIMENSIONS (HxWxD)

370 (1101 stand included) x 250 x 334 mm
15 (44 stand included) x 10 x 13 in

WEIGHT

6,8 kg - net weight (stand not included)
14,9 - net weight (stand not included)

SYSTEM

2-way shelf loudspeaker system. Vented box design.

LOUDSPEAKERS

Tw: High Definition DAD™ driver. DKM dome diaphragm, Ø 29mm
Mw: Custom diaphragm made with cellulose pulp and other natural fibers, Ø 150mm

CROSS-OVER

2.500Hz

FREQUENCY RESPONSE

45 Hz – 25.000 Hz

SENSITIVITY

87 dB SPL (2.83 V/1m)

NOMINAL IMPEDANCE

4 ohm

SUGGESTED AMPLIFIER

POWER OUTPUT
30W – 150W, without clipping

LONG-TERM MAX INPUT VOLTAGE

(IEC 268-5)
20 V rms

DIMENSIONS (HxWxD)

359 (1090 stand included) x 219 x 305 mm
14 (43 stand included) x 9 x 12 in

WEIGHT

5,5 kg - net weight (stand not included)
12,1 lb - net weight (stand not included)

SYSTEM

3-way horizontal loudspeaker system. Vented box design.

LOUDSPEAKERS

Tw: High Definition DAD™ driver. DKM dome diaphragm, Neo Magnet system. Ø 29mm
Md: Ultra-free compression basket. Custom diaphragm made with cellulose pulp and other natural fibers, Ø 2 x 150mm cone drivers.
W: Ultra-free compression basket. Custom diaphragm made with cellulose pulp and other natural fibers, Ø 2 x 150mm cone drivers.

CROSS-OVER

220Hz - 1.650Hz

FREQUENCY RESPONSE

42 Hz – 25.000 Hz

SENSITIVITY

91 dB SPL (2.83 V/1m)

NOMINAL IMPEDANCE

4 ohm

SUGGESTED AMPLIFIER

POWER OUTPUT
50W – 300W, without clipping

LONG-TERM MAX INPUT VOLTAGE

(IEC 268-5)
22 V rms

DIMENSIONS (HxWxD)

289 x 743 x 409 mm
12 x 30 x 16 in

WEIGHT

16,2 Kg ea – net weight
35,7 lb ea – net weight

DATA SHEET

SYSTEM

2-way horizontal loudspeaker system. Vented box design.

LOUDSPEAKERS

Tw: High Definition DAD™ driver. DKM dome diaphragm, Neo Magnet system. Ø 29mm
Mw: Ultra-free compression basket. Custom diaphragm made with cellulose pulp and other natural fibers, Ø 2 x 150mm cone drivers.

CROSS-OVER

1.550Hz

FREQUENCY RESPONSE

60 Hz – 25.000 Hz

SENSITIVITY

90 dB SPL (2.83 V/1m)

NOMINAL IMPEDANCE

4 ohm

SUGGESTED AMPLIFIER

POWER OUTPUT
50W – 200W, without clipping

LONG-TERM MAX INPUT VOLTAGE

(IEC 268-5)
20 V rms

DIMENSIONS (HxWxD)

242 x 495 x 303 mm
10 x 20 x 12 in

WEIGHT

6,5 Kg ea – net weight
14,3 lb ea – net weight

SYSTEM

2-way on-wall speaker. Passive radiator design.

LOUDSPEAKERS

Tw: High Definition DAD™ driver. DKM dome diaphragm, Neo Magnet system. Ø 29mm
Mw: Ultra-free compression basket. Custom diaphragm made with cellulose pulp and other natural fibers, Ø 150mm cone passive radiator.

CROSS-OVER

3.800Hz

FREQUENCY RESPONSE

60 Hz – 25.000 Hz

SENSITIVITY

89 dB SPL (2.83 V/1m)

NOMINAL IMPEDANCE

4 ohm

SUGGESTED AMPLIFIER

POWER OUTPUT
30W – 150W, without clipping

LONG-TERM MAX INPUT VOLTAGE

(IEC 268-5)
20 V rms

DIMENSIONS (HxWxD)

500 x 291 x 163 mm
20 x 12 x 7 in

WEIGHT

4,8 Kg ea – net weight
10,5 lb ea – net weight

Sonus faber
Chameleon
collection

The freedom to select
the most suitable "dress" for your speakers.





Sonus faber *Chameleon T.* ITALY
Sonus faber *Chameleon B.* ITALY
Sonus faber *Chameleon C.* ITALY



DATA SHEET

SYSTEM
2 way bookshelf vented box

LOUDSPEAKERS
Tw: Ø 29 mm
Md: Ø 150 mm
W: 2 x Ø 180 mm

CROSS-OVER
250Hz - 2.500Hz

FREQUENCY RESPONSE
38 Hz - 25.000 Hz

SENSITIVITY
90 dB SPL (2.83V/1m)

NOMINAL IMPEDANCE
4 ohm

**SUGGESTED AMPLIFIER
POWER OUTPUT**
40W - 300W without clipping

LONG-TERM MAX INPUT VOLTAGE
(IEC 268-5)
22 V rms

DIMENSIONS (HxWxD)
1060 x 270 x 355 mm
41,7 x 10,6 x 14 in

WEIGHT
24,5 Kg ea - net weight
54 lb ea - net weight

SYSTEM
2 way bookshelf vented box

LOUDSPEAKERS
Tw: Ø 29 mm
Md: Ø 150 mm

CROSS-OVER
2.500Hz

FREQUENCY RESPONSE
87 dB SPL (2.83V/1m)

SENSITIVITY
87 dB SPL (2.83V/1m)

NOMINAL IMPEDANCE
4 ohm

**SUGGESTED AMPLIFIER
POWER OUTPUT**
30W - 150W without clipping

LONG-TERM MAX INPUT VOLTAGE
(IEC 268-5)
20V rms

DIMENSIONS (HxWxD)
315,5 x 185 x 283 mm
12,4 x 7,3 x 11 in
724 x 306 x 370 mm (optional dedicated stand)
28,5 x 12 x 14,5 in (optional dedicated stand)

WEIGHT
6,7 Kg ea - net weight
14,8 lb ea - net weight
12,7 Kg ea - dedicated stand incl. (optional)
27,9 lb ea - dedicated stand incl. (optional)

SYSTEM
2 way closed box with passive radiator

LOUDSPEAKERS
Tw: Ø 29 mm
Md: Ø 150 mm
Pr: Ø 150 mm

CROSS-OVER
2.000Hz

FREQUENCY RESPONSE
50 Hz - 25.000 Hz

SENSITIVITY
87 dB SPL (2.83V/1m)

NOMINAL IMPEDANCE
4 ohm

**SUGGESTED AMPLIFIER
POWER OUTPUT**
50W - 300W, without clipping

LONG-TERM MAX INPUT VOLTAGE
(IEC 268-5)
22 V rms

DIMENSIONS (HxWxD)
199 x 540 x 228 mm
7,8 x 21,2 x 9 in

WEIGHT
8,1 Kg ea - net weight
17,8 lb ea - net weight

FINISHES

WALNUT MATTE



METAL BLUE



METAL GREY



RED GLOSS



ORANGE GLOSS



WHITE GLOSS



PIANO BLACK



GRAVIS
Sonus faber

Strength and Design at the highest level.





GRAVIS VI
Sonus faber



GRAVIS V
Sonus faber



DATA SHEET

SYSTEM

Closed box loading, two-driver, active subwoofer

SPEAKERS

2 x 320mm (12") double coil 4+4ohm, very long throw, sandwich honeycomb cone, wide rubber surround woofer

POWER AMPLIFICATION

High performance, class AB amplifier 1.800 W

FREQUENCY RESPONSE

18 Hz (@ - 6dB, acoustic Linkwitz 4th order roll-on, EQ1 setting) to Fc (user continuously adjustable)

VOLTAGE MAINS INPUT VOLTAGE

Selectable, 120Vac - 60Hz or 230 Vac - 50 Hz

FUSE

T12A H 250V (for 230 Vac - 60Hz) T6.3A H 250V (for 110 Vac - 50Hz)

CONTROLS

Direct access Master volume; App control featuring: volume, continuously adjustable crossover frequency (40 to 150Hz), filtering slope 24dB/oct; continuously adjustable signal phase; parametric EQ (4 presets available), Delay (1 to 20 ms); auto eq; auto power on/off switch

AUDIO SIGNAL INPUTS

2x Line level, left and right/LFE RCA phono plugs (unbalanced)
2x Line Level, left and right/LFE XLR plugs (balanced)
1x High level, Neutrik 4-pole Speakon®

POWER CONSUMPTION

0.5 W (Stand-by)
1800W (Peak)

DIMENSIONS (HxWxD)

616 x 448,5 x 585,5 mm including feet
24 x 17,6 x 23 in including feet

WEIGHT

52 Kg / 114,64 ib

SYSTEM

Closed box loading, single driver, active subwoofer

SPEAKERS

1 x 320mm (12") double coil 4+4ohm, very long throw, sandwich honeycomb cone, wide rubber surround

POWER AMPLIFICATION

High performance, class AB amplifier 850 W

FREQUENCY RESPONSE

20 Hz (@ - 6dB, acoustic Linkwitz 4th order roll-on, EQ1 setting) to Fc (user continuously adjustable)

VOLTAGE MAINS INPUT VOLTAGE

Selectable, 120Vac - 60Hz or 230 Vac - 50 Hz

FUSE

T12A H 250V (for 230 Vac - 50Hz) T6.3A H 250V (for 110 Vac - 60Hz)

CONTROLS

Direct access Master volume; App control featuring: volume, continuously adjustable crossover frequency (40 to 150Hz), filtering slope 24dB/oct; continuously adjustable signal phase; parametric EQ (4 presets available), Delay (1 to 20 ms); auto eq; auto power on/off switch

AUDIO SIGNAL INPUTS

2x Line level, left and right RCA phono plugs (unbalanced)
2x Line Level, left and right XLR plugs (balanced)
1x High level, Neutrik 4-pole Speakon®

POWER CONSUMPTION

0.5 W (Stand-by)
1200W (Peak)

DIMENSIONS (HxWxD)

455 x 448,5 x 448,5 mm including feet
17,9 x 17,6 x 17,6 in including feet

WEIGHT


32 Kg / 70.5479 ib

FINISHES

RED LACQUERED BLACK LINE



WENGE LACQUERED WHITE LINE

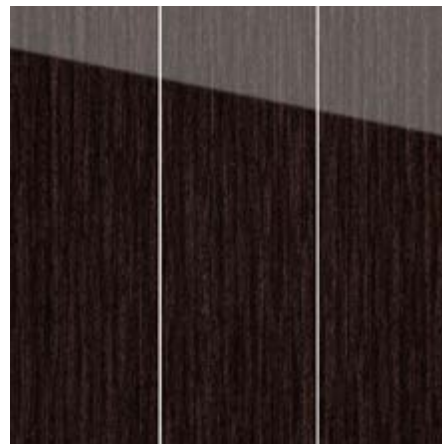

PIANO BLACK



BLACK LEATHER



BLACK LEATHER



BLACK LEATHER





GRAVIS II
Sonus faber



GRAVIS I
Sonus faber



DATA SHEET

SYSTEM

Passive radiator bass-reflex loading active subwoofer

SPEAKERS

1 x 260mm (10") very long throw, treated paper cone, wide rubber surround woofer

POWER AMPLIFICATION

High linearity Class AB
350 W rms, 700 W (peak)

FREQUENCY RESPONSE

From 25/35 Hz to Fc (user adjustable)

VOLTAGE MAINS INPUT VOLTAGE

Factory selected, 120Vac - 60Hz or 230 Vac - 50 Hz

FUSE

T6.3A (110Vac, 60Hz); T3.15A (230V, 50Hz)
Output signal short circuit;
Over-heating;
DC fault

CONTROLS

Independent Master and LFE volume controls;
Continuously adjustable Crossover frequency (30 to 120Hz), slope 24dB/oct;
Signal phase inversion switch (0/180°)
Auto switch-on/off (deselectable)

AUDIO SIGNAL INPUTS LFE

(Low Frequency Effect), single phono plug;
Line level signal, single phono plug;
High level signals, Neutrik 4-pole Speakon®

POWER CONSUMPTION

0.5 W (Stand-by)
450W (Rated power)

DIMENSIONS (HxWxD)

404 x 356 x 408 mm including feet
15,9 x 14 x 16 in including feet

WEIGHT

21,5 Kg
47,3 lb

SYSTEM

Closed box loading, down firing active subwoofer

SPEAKERS

1 x 210mm (8") very long throw, treated paper cone, wide rubber surround woofer

POWER AMPLIFICATION

High linearity Class AB
150 W rms, 250 W (peak)

FREQUENCY RESPONSE

Factory selected, 120Vac - 60Hz or 230 Vac - 50 Hz

VOLTAGE MAINS INPUT VOLTAGE

Factory selected, 120Vac - 60Hz or 230 Vac - 50 Hz

FUSE

T4.0A (110Vac, 60Hz); T2.0A (230V, 50Hz)
Output signal short circuit
Over-heating
DC fault

CONTROLS

Independent Master and LFE volume controls;
Continuously adjustable Crossover frequency (30 to 120Hz), slope 24dB/oct;
Signal phase inversion switch (0/180°)
Auto switch-on/off (deselectable)

AUDIO SIGNAL INPUTS

LFE (Low Frequency Effect), single phono plug;
Line level signal, single phono plug;
High level signals, Neutrik 4-pole Speakon®

POWER CONSUMPTION

0.5 W (Stand-by)
250W (Rated power)

DIMENSIONS (HxWxD)


334 x 286 x 316 mm including feet
13.1 x 11.2 x 12.4 in including feet

WEIGHT

14.5 Kg
32 lb

FINISHES

WHITE MATTE

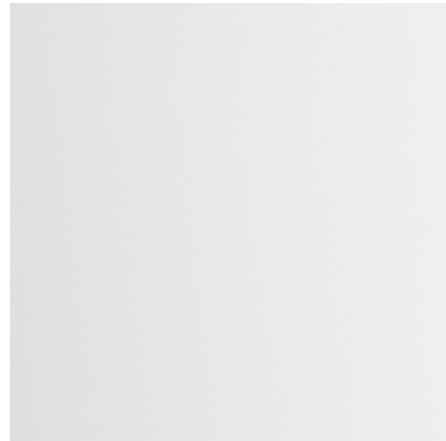

WALNUT MATTE OPEN PORE



PIANO BLACK



BLACK LEATHER



BLACK LEATHER



BLACK LEATHER





Emotion. Connection. Desire.

2016 marked a new chapter in
Sonus faber's rich history with the re-birth of
a classic icon first pioneered in 1980: The Snail.





Emotion. Connection. Desire.



DATA SHEET

SYSTEM

3 ways, Sound Field Shaper technology, Bipole/Dipole radiation for enhanced stereo width

AUDIO INPUTS

1x AUX (analog RCA)
1x Digital S/pdif coaxial
1x Digital Toslink optical
1x Play-Fi Wireless standards 802.11a/b/g/n protocol

FILE FORMATS

MP3, AAC, FLAC, WAV

SUPPORTED INTERNET MUSIC SERVICES

Deezer, KKbox, Rhapsody, Songza, Tidal, Spotify®, Amazon music, iHeartradio, Pandora, Sirius XM, internet radios.

SUPPORTED MEDIA SERVER

DLNA

CONNECTIVITY (REMOTE CONTROL)

Wi-Fi (802.11b/g)

DRIVERS

2x 5" long throw subwoofers, push-push structure, "Zero Vibration Technology" 2 satellite Front/Back with 4x ceramic 2" Midrange + 4x 5/8" tweeter point source silk dome

POWER AMPLIFICATION

1400 W total, 4 Ω

DIMENSIONS (HxWxD)

Closed: 230 x 640 x 415 mm

9,05 x 25,1 x 16,3 in

Opened: 262 x 1080 x 415 mm

10,3 x 42,5 x 16,3 in

WEIGHT

25 Kg ea – net weight

55,1 lb ea – net weight

A.C. MAINS VOLTAGE

100 - 240 V, 50/60 Hz

POWER CONSUMPTION


Typical use 340W

Stand-by: <0,5W



FINISHES

WALNUT MATTE CLOSED PORE

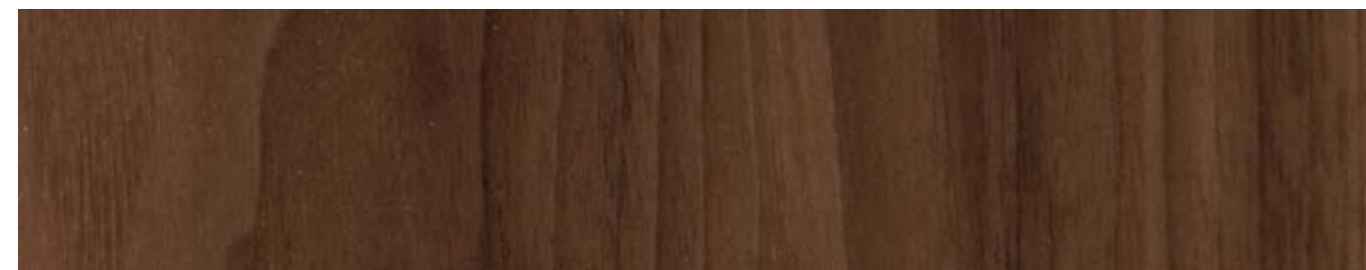

ALUMINUM

